


LA100W.000.24

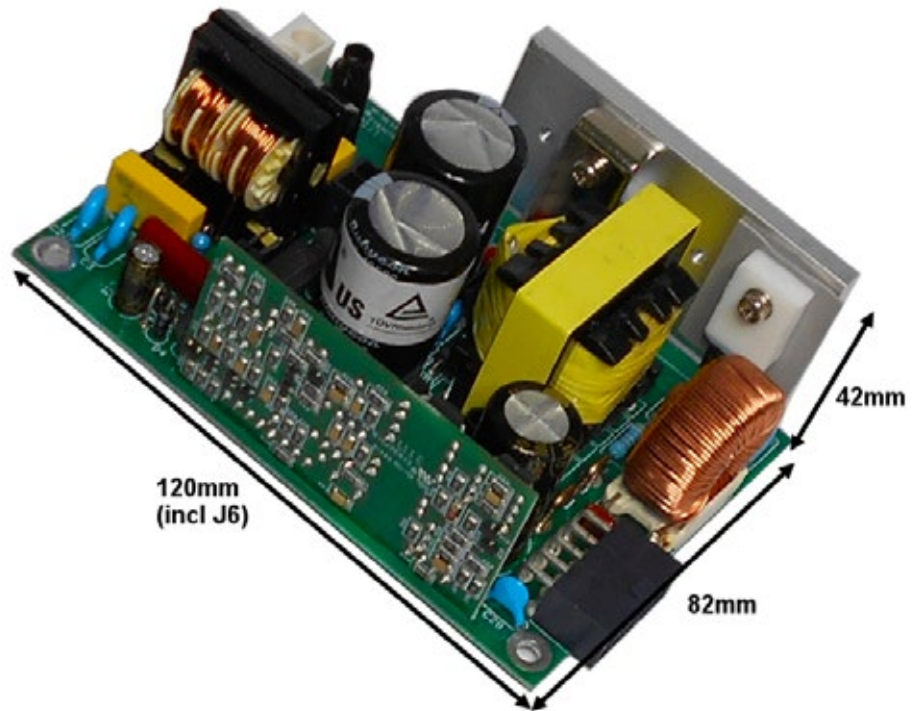

OVERVIEW	
95W power supply	
Able to deliver 3 times the nominal output power	
UL class 2 approved	
AC in voltage monitor output signal	
Custom made	

INPUT	
Jumper selectable input voltage range	90-135VAC 190Vac-264Vac
Leakage current	1 mA RMS max.
Efficiency	>85%

OUTPUT	
Nominal Output Power	95 W
Peak Output Power	300W (5 seconds)
Single Output	24 Vdc
UL 60950 Class 2 approved	

PROTECTIONS	
Under/Overvoltage protection	
Overload/Short circuit protection	
Overcurrent protection	
Microprocessor controlled protections	

CERTIFICATIONS	
UL	
UL CLASS2	
TUV	
CE	

CONNECTIONS	
Input	3 pins connector
115Vac	2pins connector Jumper
Output	10 pins connectors

DIMENSIONS AND WEIGHT	
Dimensions (L x W x H)	116 x 82 x 42 mm
Weight	340g

SAFETY AND EMC		
EN 60950 UL APPROVED	IEC/EN 61000-3-2	IEC/EN 61000-3-3
EN 60335 UL APPROVED	IEC/EN 61000-4-2	IEC/EN 61000-4-3
EN 61558 TUV APPROVED	IEC/EN 61000-4-4	IEC/EN61000-4-5
EN 55014	IEC/EN 61000-4-6	IEC/EN61000-4-11
IEC/EN 60335-2-75	IEC/EN 61000-6-2	IEC/EN61000-6-3



RoHS
Compliant