


LA 160W.00U.24

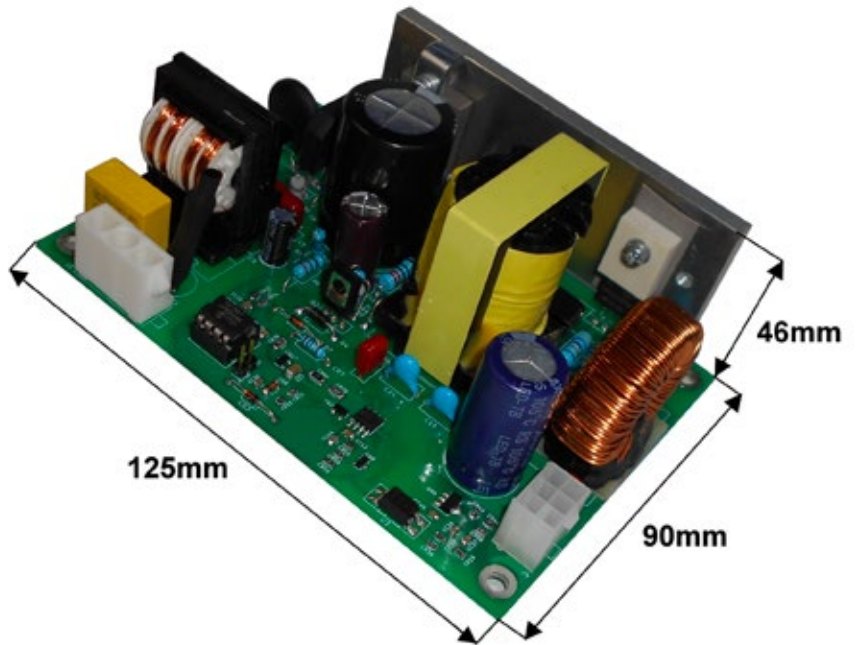

OVERVIEW	
160W power supply	
Able to deliver 480W (for 1,5 seconds)	
AC in voltage monitor output signal	
Custom made	

INPUT	
Input voltage range	190Vac-264Vac
Leakage current	1mA RMS max.
Efficiency	>85%

OUTPUT	
Nominal Output Power	160W
Peak Output Power	480W (for 1,5 seconds)
Single Output	24Vdc or 36VDC

PROTECTIONS	
Under/ Overvoltage protection	
Overload/ Short circuit protection	
Overcurrent protection	
Microprocessor controlled protections	

CERTIFICATIONS
CE

CONNECTIONS	
Input	3 pins connector
Output	6 pins connectors

DIMENSIONS AND WEIGHT	
Dimensions (L x W x H)	125 x 90 x 46H mm
Weight	400g

SAFETY AND EMC		
EN 60950-1	IEC/EN 61000-3-2	IEC/EN 61000-3-3
EN 60335-1	IEC/EN 61000-4-2	IEC/EN 61000-4-3
EN 61558	IEC/EN 61000-4-4	IEC/EN61000-4-5
EN 55014	IEC/EN 61000-4-6	IEC/EN61000-4-11
IEC/EN 60335-2-75	IEC/EN 61000-6-2	IEC/EN61000-6-3

